


MARKING CONTENT ON REVERSE SIDE:

PART NO. 28028260-S 22.5*8.25 15° DC DATE X X X
 MAX LOAD 3650KG MAX KPA978 HDS 167.5 KBA XXXXX
 (ACCORDING TO CUSTOMER REQUIREMENTS,
 TYPEFACE:SIX TIMES NEW ROMAN,
 THE DEPTH OF WORKS:0.3MM)




◆ Dynamic Unbalance

- 1、A ≤ 30G
- 2、B ≤ 30G
- 3、A+B ≤ 50G

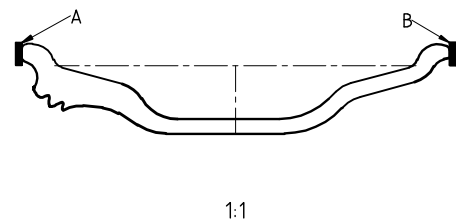

Technical note:

1. Compliance with US Federal Motor Vehicle Safety No. 120
2. Durability Test (SAE J267)
 Cornering Fatigue Test
 -Loading Mode: 90°
 -Load: 2445 ± 87kg.m
 -Cycle: 300000
- Radial Fatigue Test
 -Load: 10220 ± 346kg.m
 -Cycle: 100000
3. Tyre: 295/80R22.5, radius: 0.503m
4. Valve balance testing standards: max 1500g.cm
5. Valve: TR554D.
6. Valve nut
 torque: 80-125TN. LBS (8.95-14.64n. m)
7. Valve cap: 2-101
8. Two pieces nuts
 M22-1.5, torque: 62/69kg. m
9. Tolerance
 Dimensional Tolerance ±1
 Angle Tolerance ±1°
 Radius Tolerance ±1

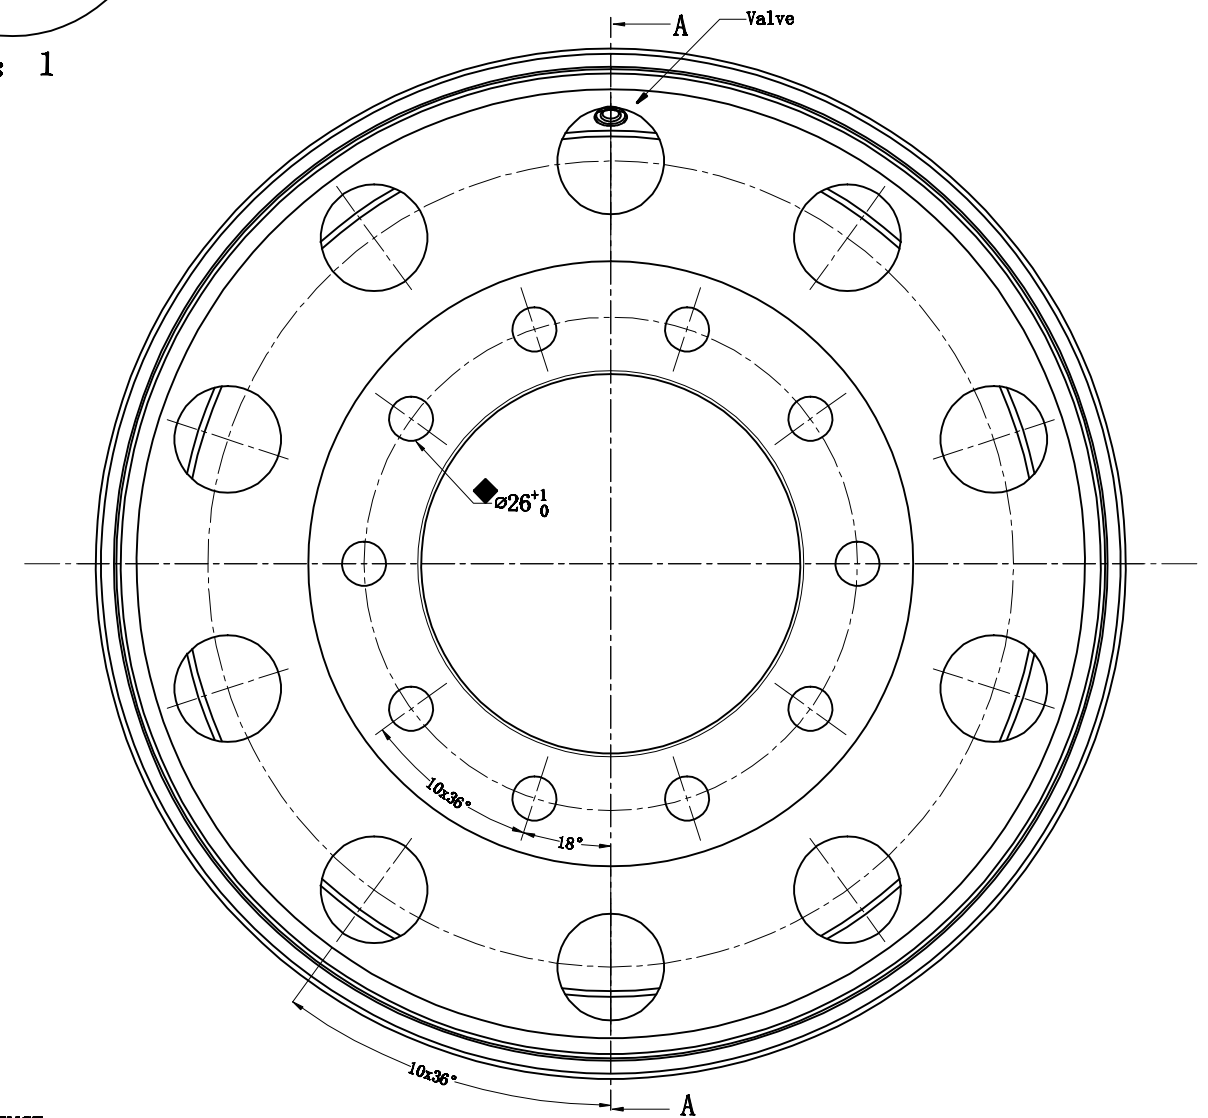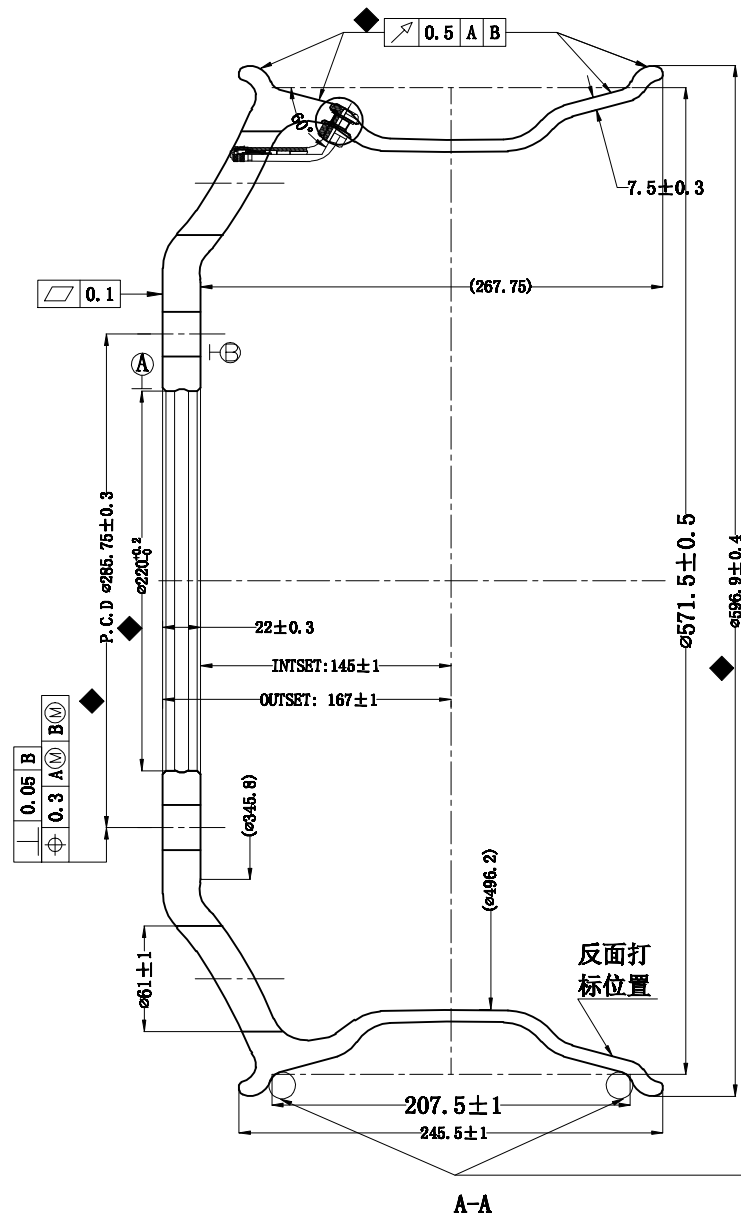

球带尺直径
 INSPECT CIRCUMFERENCE
 USING ø16MM
 (0.629 INCHSI
 DISE TAPE PER TIRE AND
 RIM ASSOC SPECIFICATION
 The ball with feet in diameter
 INSPECT CIRCUMFERENCE
 USING ø16MM
 (0.629 INCHSI
 DISE TAPE PER TIRE AND
 RIM ASSOC SPECIFICATION

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	◆
Key Features	★

Design		Product picture	GT034-11 - 22.5*8.25 ET:inset/outset:145-167	Drawing NO.	28028260-S	
Proofreader		Vehicle model		Edition	Weight (Theory)	Percentage
Examination		Surface treatment	Material/polishing	A/1	21.4Kg	1:1
Technology		Material	6061-T6	A total of one The first page		
Standardisation		Projection marks		QINGDAO J&G		
Ratification		Date				