


MARKING CONTENT ON REVERSE SIDE:

PART NO. 760022260 17.5*6.00 15° DC DATE X X X
 MAX LOAD 2000KG MAX KPA700
 (ACCORDING TO CUSTOMER REQUIREMENTS,
 TYPEFACE:SIX TIMES NEW ROMAN,
 THE DEPTH OF WORKS:0.3MM)



◆ **Dynamic Unbalance**

- 1、A ≤ 30G
- 2、B ≤ 30G
- 3、A+B ≤ 50G




Technical note:

1. Compliance with US Federal Motor Vehicle Safety No. 120
2. Durability Test (SAE J267)
 - ★ **Cornering Fatigue Test**
 - Loading Mode: 90°
 - Load: 1060 ± 87kg. m
 - Cycle: 300000
 - ★ **Radial Fatigue Test**
 - Load: 5600 ± 346kg. m
 - Cycle: 100000
3. Tyre: 220/70R17.5, radius: 0.393m
4. Valve balance testing standards: max 100g. cm
5. Valve: TR554D.
- ◆ **6. Valve nut torque. LBS (8.95-14.64n. m)**
7. Valve cap: 2-101
8. Two pieces nuts
M22-1.5, torque: 62/69kg. m
9. Tolerance
 Dimensional Tolerance ±1
 Angle Tolerance ±1°
 Radius Tolerance ±1

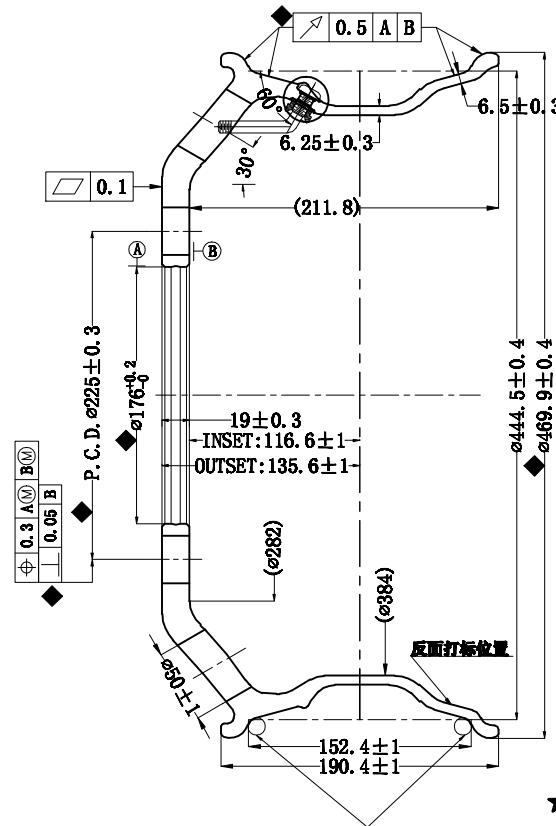

2:1

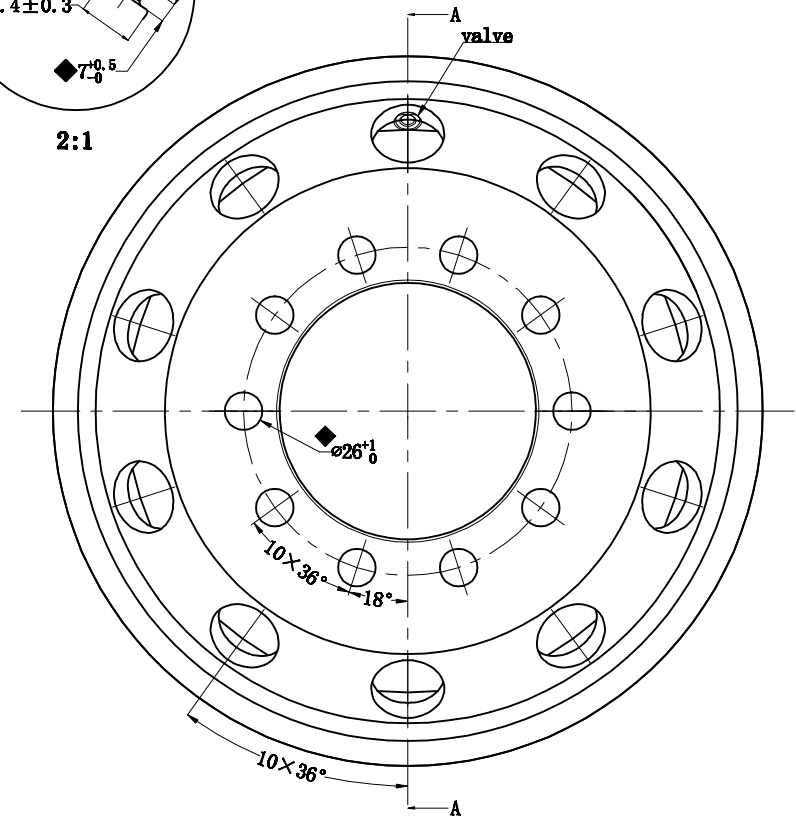

★ The ball with feet in diameter
 INSPECT CIRCUMFERENCE
 USING e16MM
 (0.629 INCHSI
 DISC TAPE PER TIRE AND
 RIM ASSOC SPECIFICATION

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	◆
Key Features	★

Design		Product picture	GT062-04 17.5×6.0 INSET/OUTSET: 116.6/135.6	Drawing NO.	760022260	
Proofreader		Vehicle model		Edition	Weight (Theory)	Percentage
Examination		Surface treatment	Material/polishing	A/1	12.5Kg	1:1
Technology		Standardisation		A total of one		The first page
Ratification		Material	6061-T6	QINGDAO J&G		
Date		Projection marks	▷ ⊕			