


MARKING CONTENT ON REVERSE SIDE:

PART NO. 29035260-A 22.5*9.0 15° DC DATE X X X
 MAX LOAD 4700KG MAX KPA978 HDS 175.5 KBA XXXX
 (ACCORDING TO CUSTOMER REQUIREMENTS,
 TYPEFACE:SIX TIMES NEW ROMAN,
 THE DEPTH OF WORKS:0.3MM)

◆ Dynamic Unbalance



- 1、A ≤ 30G
- 2、B ≤ 30G
- 3、A+B ≤ 50G




1:1

Technical note:

1. Compliance with US Federal Motor Vehicle Safety No.120
- ★ 2. Durability Test (SAE J267)
 Cornering Fatigue Test
 -Loading Mode:90°
 -Load:3197±87kg. m
 -Cycle:300000
- ★ Radial Fatigue Test
 -Load:13160±346kg. m
 -Cycle:100000
- 3、 Tyre:315/80R22.5, radius:0.503m
4. Valve balance testing standards:max1500g. cm
5. Valve:V3-20-1AA
- ◆ 6. Valve nut
 torque:80-125TN. LBS (8.95-14.64n. m)
7. Valve cap:TRVC2
8. Two pieces nuts
 M22-1.5, torque:62/69kg. m
9. Tolerance
 Dimensional Tolerance ±1
 Angle Tolerance ±1°
 Radius Tolerance ±1

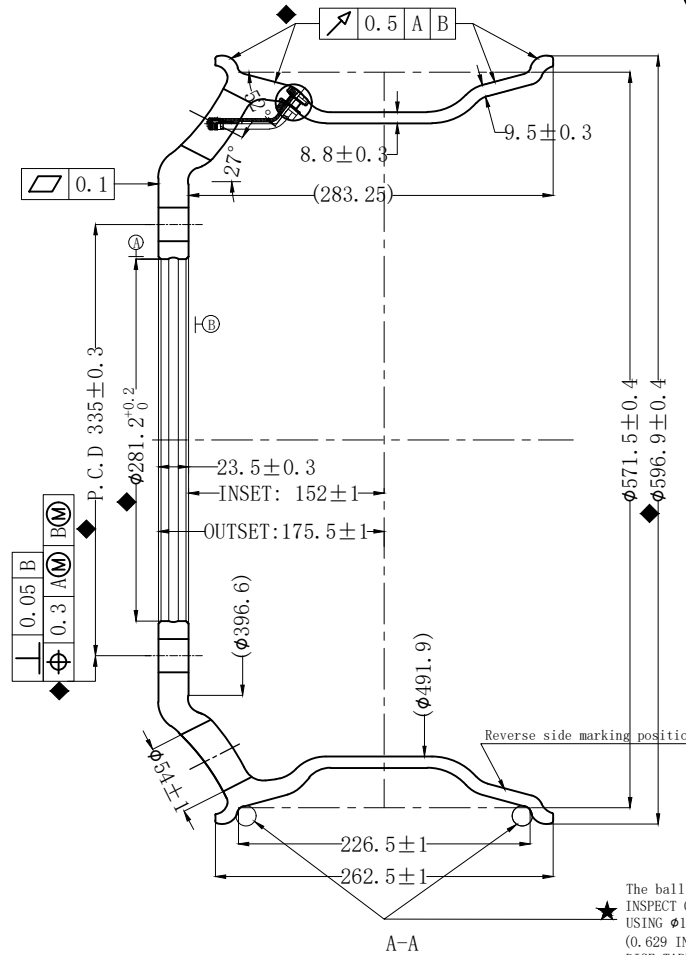

2:1

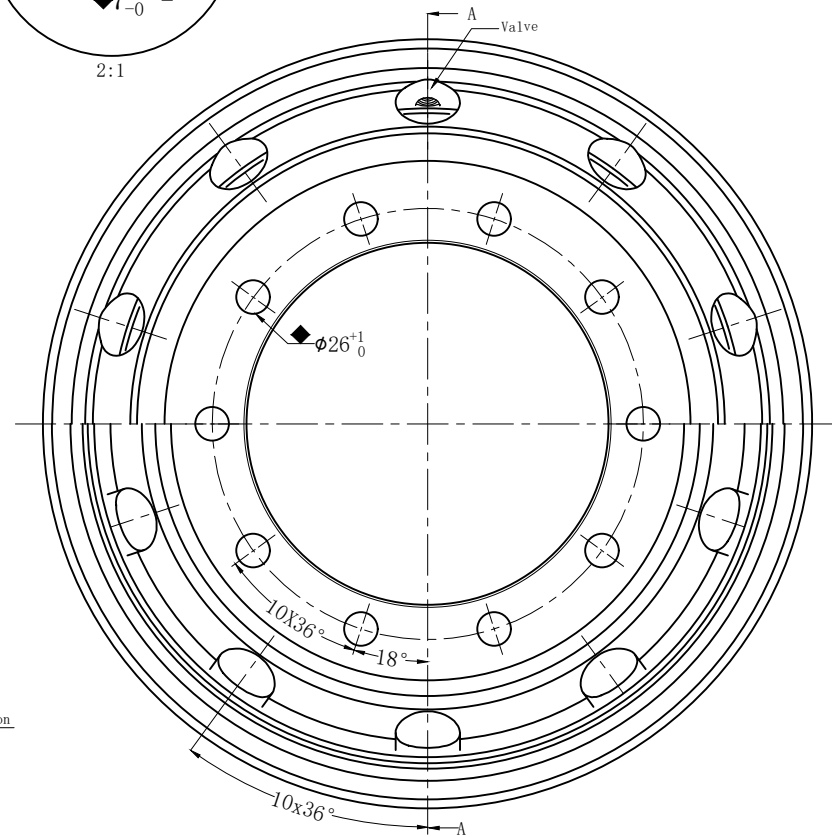

★ The ball with feet in diameter
 INSPECT CIRCUMFERENCE
 USING φ16MM
 (0.629 INCHSI
 DISE TAPE PER TIRE AND
 RIM ASSOC SPECIFICATION

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	
Key Features	

Design		Product picture	GT019-01 - 22.5*9.0	Drawing NO.	29035260-A	
Proofreader			ET: inset/outset: 152/175.5	Edition	Weight (Theory)	Percentage
Examination		Vehicle model		A/1	24.5Kg	1:1
Technology		Surface treatment	Material/polishing	A total of one		The first page
Standardisation				Qingdao J&G		
		Material	6061-T6			
Ratification		Projection marks				
Date						