


MARKING CONTENT ON REVERSE SIDE:

PART NO. 97027240 19.5x7.5 15° DC DATE X X X
 MAX LOAD 3000KG MAX KPA850
 (ACCORDING TO CUSTOMER REQUIREMENTS,
 TYPEFACE:SIX TIMES NEW ROMAN,
 THE DEPTH OF WORKS:0.3MM)




◆ Dynamic Unbalance

- 1、A ≤ 30G
- 2、B ≤ 30G
- 3、A+B ≤ 50G



Technical note:

- ★ 1. Compliance with US Federal Motor Vehicle Safety No.120
- ★ 2. Durability Test (SAE J267)
 Cornering Fatigue Test
 -Loading Mode:90°
 -Load:1709±87kg. m
 -Cycle:300000
- ★ Radial Fatigue Test
 -Load:8400±346kg. m
 -Cycle:100000
- 3. Tyre:285/70R19.5, radius:0.410m
- 4. Valve balance testing standards:max1100g. cm
- ◆ 5. Valve:TR554D.
- ◆ 6. Valve nut
 torque:80-125TN. LBS(8.95-14.64n. m)
- 7. Valve cap:2-101
- 8. Two pieces nuts
 M22-1.5, torque:62/69kg. m
- 9. Tolerance
 Dimensional Tolerance ±1
 Angle Tolerance ±1°
 Radius Tolerance ±1

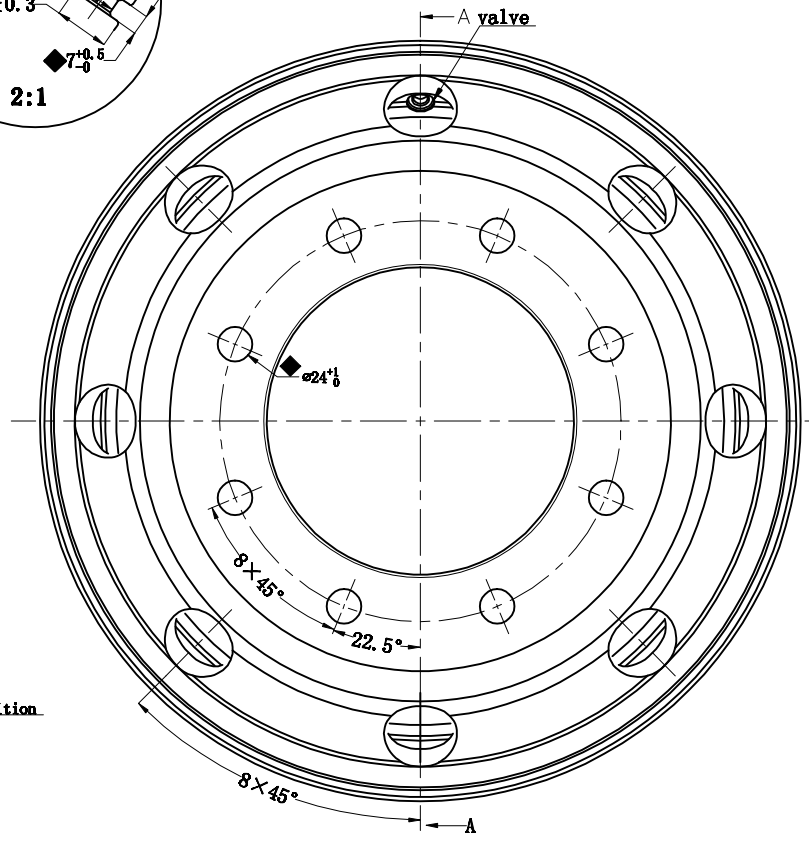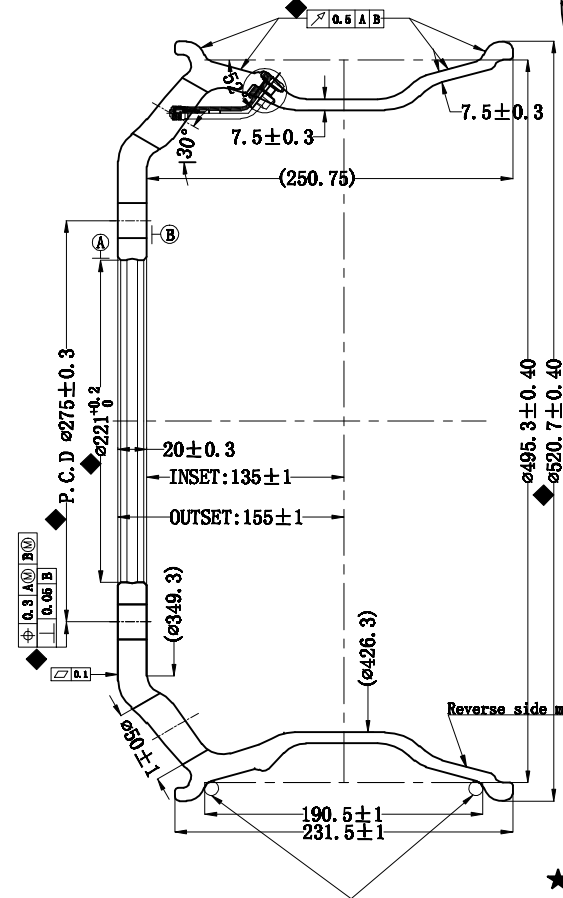

★ The ball with feet in diameter
 INSPECT CIRCUMFERENCE
 USING ø16MM
 (0.629 INCHSI
 DISE TAPE PER TIRE AND
 RIM ASSOC SPECIFICATION

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	◆
Key Features	★

Design		Product picture	GT090-01 19.5*7.5 INSET/OUTSET: 135/155	Drawing NO.	97027240	
Proofreader		Vehicle model		Edition	Weight (Theory)	Percentage
Examination		Surface treatment	Material/polishing	A/1	18Kg	1:1
Technology		Standardisation		A total of one		The first page
Ratification		Material	6061-T6	QINGDAO J&G		
Date		Projection marks				