


PART NO. 97028260 19.5x7.5 15° DC DATE X X X
MAX LOAD 3000KG MAX KPA850
(ACCORDING TO CUSTOMER REQUIREMENTS,
TYPEFACE:SIX TIMES NEW ROMAN,
THE DEPTH OF WORKS:0.3MM)

- 1、 $A \leq 30G$
- 2、 $B \leq 30G$
- 3、 $A+B \leq 50G$



1.Compliance with US Federal Moter
Vehicle Safety No.120

-Loading Mode:90°
-Load:1709±87kg.m
-Cycle:300000

. Tyre:285/70R19.5, radius:0.410m

5. Valve:TR554D.

torque:80-125TN. LBS (8.95-14.64n. m)


8. Two pieces nuts

M22-1.5, torque:62/69kg.m



Dimensional Tolerance ± 1

Angle Tolerance $\pm 1^\circ$

Radius Tolerance ± 1

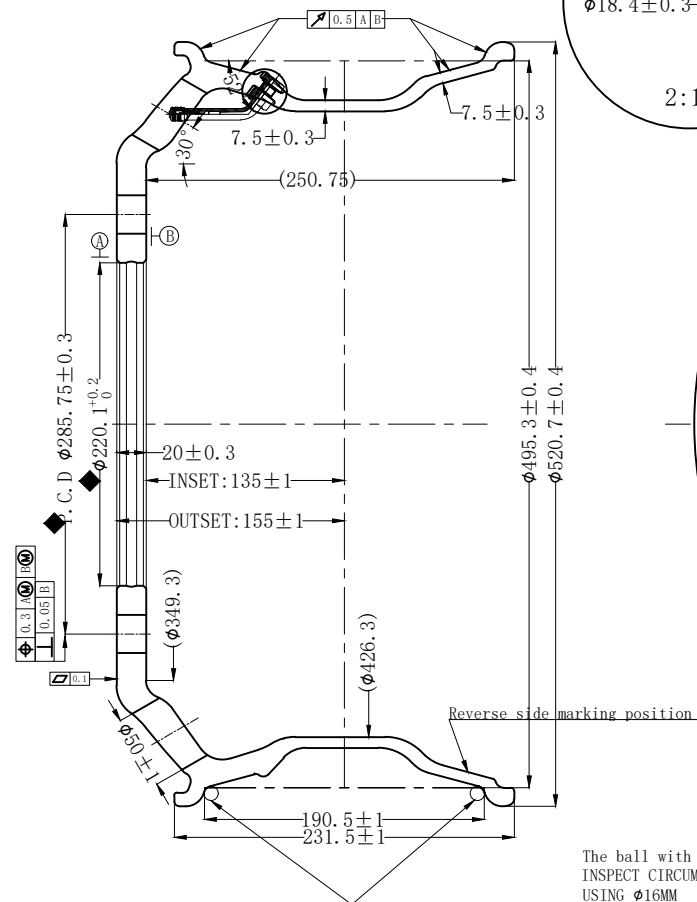


The ball with feet in diameter
INSPECT CIRCUMFERENCE
USING $\phi 16\text{MM}$
— (0.629 INCHSI
DISE TAPE PER TIRE AND
RIM ASSOC SPECIFICATION

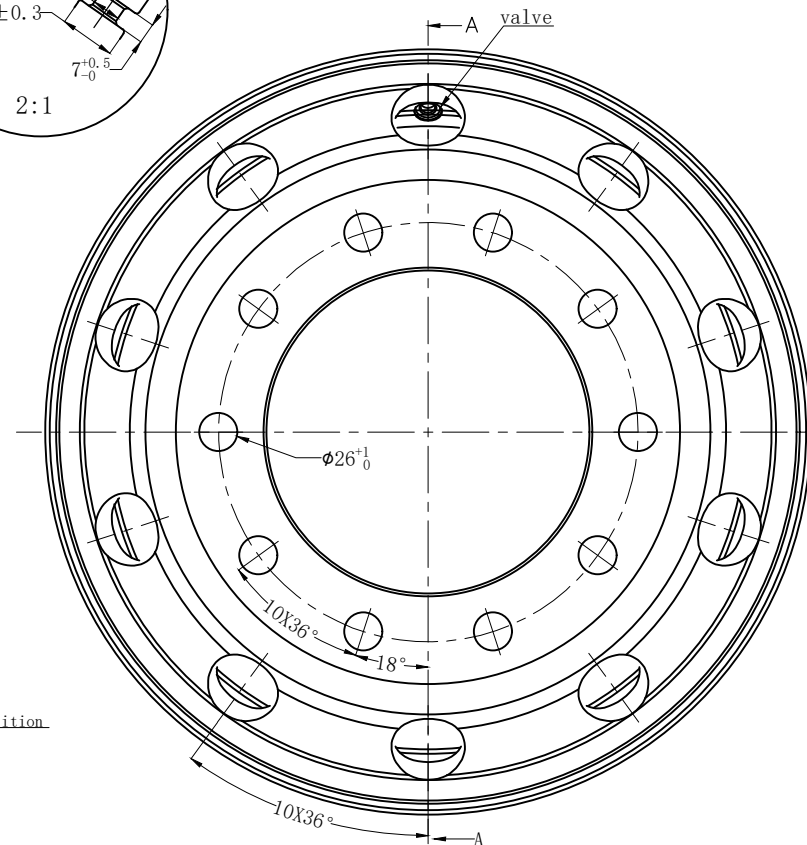

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	◆
Key Features	★

Design	Product picture	GT090-09 19.5*7.5 INSET/OUTSET: 135/155	Drawing NO.	97028260	
Proofreader			Edition	Weight (Theory)	Percentage
Examination	Vehicle model	Material/polishing	A/1	18Kg	1:1
Technology	Surface treatment		A total of one		The first page
Standardisation	Material	6061-T6	QINGDAO J&G		
Ratification					
Date	Projection marks				