


MARKING CONTENT ON REVERSE SIDE:

PART NO. 9702732022-A 19.5x7.5 15° DC DATE X X X  
 MAX LOAD 3000KG MAX KPA850  
 (ACCORDING TO CUSTOMER REQUIREMENTS,  
 TYPEFACE:SIX TIMES NEW ROMAN,  
 THE DEPTH OF WORKS:0.3MM)



◆ Dynamic Unbalance

- 1、A≤30G
- 2、B≤30G
- 3、A+B≤50G

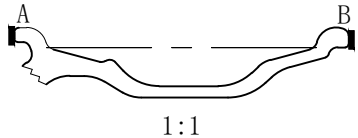

Technical note:

1. Compliance with US Federal Motor Vehicle Safety No.120
- ★ 2. Durability Test (SAE J267)  
 Cornering Fatigue Test  
 -Loading Mode:90°  
 -Load:1709±87kg.m  
 -Cycle:300000
- ★ 3. Radial Fatigue Test  
 -Load:8400±346kg.m  
 -Cycle:100000
3. Tyre:285/70R19.5, radius:0.410m
4. Valve balance testing standards:max1100g.cm
5. Valve:TR554D.
- ◆ 6. Valve nut  
 torque:80-125TN. LBS (9-14n. m)
7. Valve cap:2-101
8. Two pieces nuts  
 M22-1.5, torque:62/69kg. m
9. Tolerance  
 Dimentional Tolerance ±1  
 Angle Tolerance ±1°  
 Redius Tolerance ±1

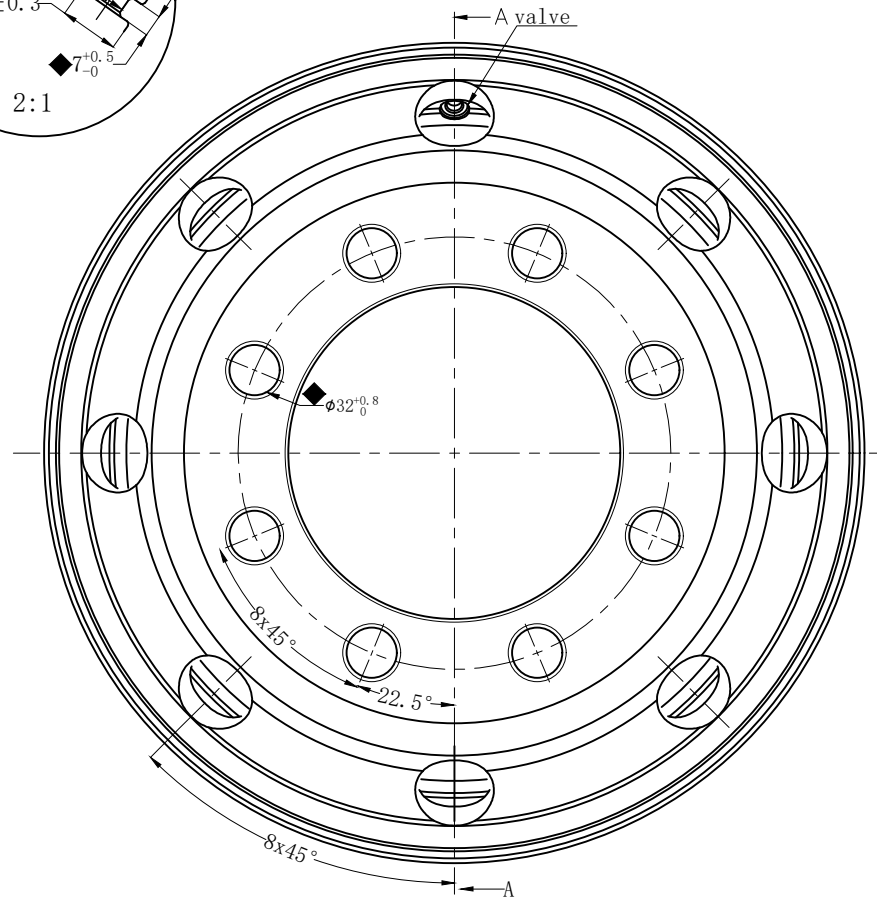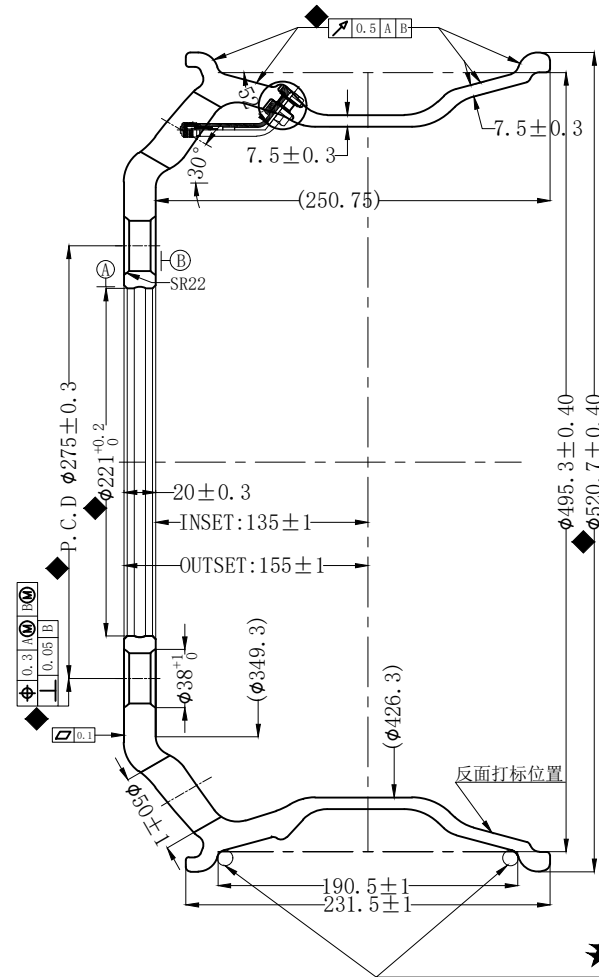

★ The ball with feet in diameter  
 INSPECT CIRCUMFERENCE  
 USING  $\phi 16\text{MM}$   
 (0.629 INCHSI  
 DISE TAPE PER TIRE AND  
 RIM ASSOC SPECIFICATION

Changed the level	Place a few	Changed notification number	Changed content	Signature	Date

Important features	◆
Key Features	★

Design	Product picture	GT090-11 19.5*7.5 INSET/OUTSET: 135/155	Drawing NO.	9702732022-A	
Proofreader	Vehicle model		Edition	Weight (Theory)	Percentage
Examination	Surface treatment	Material/polishing	A/1	18Kg	1:1
Technology	Material	6061-T6	A total of one		The first page
Standardisation	Projection marks		<b>Qingdao J&amp;G</b>		
Ratification					
Date					